

Brocas escalonadas




Broca escalonada Bit HSS, rectificada por CBN, de ranura helicoidal con split point



Unidad de envase: envase de plástico individual

Artículo	Tamaño Nr.	Ø1 - Ø2 mm	L1 mm	Pasos	Ø3 mm	Cod. barras 4007140	
101 051 H	1	4,0-20,0	81	9	6,35 x 27	089489	1
101 052 H	2	4,0-30,0	105	14	6,35 x 27	111135	1

0/9	4,0 / 5,0 / 6,0 / 7,0 / 8,0 / 9,0 / 10,0 / 11,0 / 12,0
1	4,0 / 6,0 / 8,0 / 10,0 / 12,0 / 14,0 / 16,0 / 18,0 / 20,0
2	4,0 / 6,0 / 8,0 / 10,0 / 12,0 / 14,0 / 16,0 / 18,0 / 20,0 / 22,0 / 24,0 / 26,0 / 28,0 / 30,0

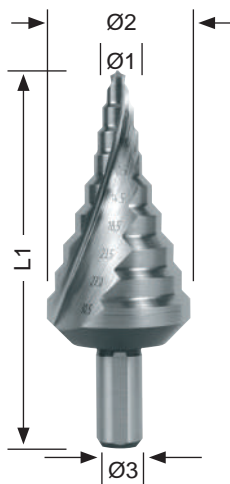


Broca escalonada HSS, rectificada por CBN, de ranura helicoidal con split point para atornillamientos métricos de cables




Unidad de envase: envase de plástico individual

Artículo	Medidas	Tamaño Nr.	Ø1 - Ø2 mm	L1 mm	Pasos	Ø3 mm	Cod. barras 4007140	
101 093	Agujeros de núcleo	14	5,3-30,5	79,0	9	10,0	078384	1
101 092	Agujeros pasantes	15	6,5-32,5	79,0	9	10,0	078391	1
101 091	Agujeros de núcleo	16	5,3-38,5	96,0	11	10,0	078360	1
101 090	Agujeros pasantes	17	6,5-40,5	96,0	11	10,0	078377	1

14	DIN/EN 60423	5,3 / 7,0 / 9,0 / 10,5 / 14,5 / 18,5 / 23,5 / 27,0 / 30,5
15	DIN/EN 50262	6,5 / 8,5 / 10,5 / 12,5 / 16,5 / 20,5 / 25,5 / 29,0 / 32,5
16	DIN/EN 60423	5,3 / 7,0 / 9,0 / 10,5 / 14,5 / 18,5 / 23,5 / 27,0 / 30,5 / 34,5 / 38,5
17	DIN/EN 50262	6,5 / 8,5 / 10,5 / 12,5 / 16,5 / 20,5 / 25,5 / 29,0 / 32,5 / 36,5 / 40,5

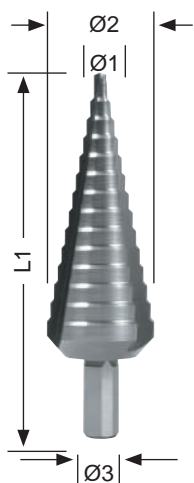

Broca escalonada HSS, rectificada por CBN, con 3 canales de salida



Especial para aluminio y metales blandos. Rectificado CBN.

Unidad de envase: envase de plástico individual

Artículo	Tamaño Nr.	Ø1 - Ø2 mm	L1 mm	Pasos	Ø3 mm	Cod. barras 4007140	
101 350-9	0/9	4,0-12,0	65	9	6	109019	1
101 351	1	4,0-20,0	75	9	8	109026	1
101 352	2	4,0-30,0	100	11	10	109033	1

0/9	4,0 / 5,0 / 6,0 / 7,0 / 8,0 / 9,0 / 10,0 / 11,0 / 12,0
1	4,0 / 6,0 / 8,0 / 10,0 / 12,0 / 14,0 / 16,0 / 18,0 / 20,0
2	4,0 / 6,0 / 8,0 / 10,0 / 12,0 / 14,0 / 16,0 / 18,0 / 20,0 / 22,0 / 24,0 / 26,0 / 28,0 / 30,0